

CULTILINE HR SERIES 1000




More competitive than ever!

SULKY, the seed drilling specialist, is developing its CULTILINE HR range. These "1000 Series" rotary harrows with 4 rotors to the metre will provide you with greater efficiency, sturdiness, and ease of adjustment. One by one, discover these developments and compare them! You will quickly see that the CULTILINE HRs are truly "top-of-the-range"!

**4 rotors per metre :
Up to 15 % power economy !**

- test conditions : soil just ploughed (sandy clay)
- forward speed : 7.5 km/h
- average working depth : 9 cm
- crumbling intensity equivalent between both methods

Full test report on www.lfl.bayern.de

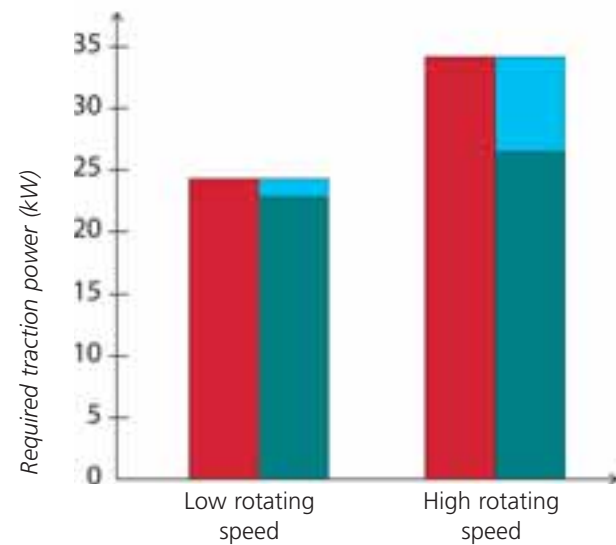

■ 3 m - 10 rotors ■ 3 m - 12 rotors ■ Traction sparing

Source: Bavarian Institute of Agriculture, Weihenstephan (Germany)

CULTILINE HR SERIES 1000



- Packer roller, 460 or 550 mm,
- Furrow roller, 580 mm,
- Cage-mounted roller, 500 mm.



Technical characteristics

Model	3000.19	3000.26	3500.22	3500.26	4000.22	4000.26
Working width	3 m	3 m	3,50 m	3,50 m	4 m	4 m
Number of rotors	12	12	14	14	16	16
Power	70 - 190 cv	120 - 260 cv	90 - 220 cv	120 - 260 cv	90 - 220 cv	120 - 260 cv
Power take-off (min ⁻¹)	1 000 rpm					
Type of safety device	Torque limiter with automatic triggering and rearming					
Adjustment of the speed of rotation	Pinions (2 speeds)	Lever + pinions (2x2 speeds)	Pinions (2 speeds)	Lever + pinions (2x2 vitesses)	Pinions (2 speeds)	Lever + pinions (2x2 speeds)

All our departments assist your performance



For your peace of mind customer service is our priority. Our dealers are there to explain the advantages of your Sulky. Our technicians support them with advice and produce the instructions for the use of your machine.

75 1936
2011
years
at your side

www.sulky-burel.com




The specialist in seed drilling and fertiliser spreading


SULKY-BUREL
Les Portes de Bretagne - P.A. de la Gaultière - 35220 CHATEAUBOURG, France
Tél. : (33) 02 99 00 84 84 • Fax : (33) 02 99 62 39 38 • E-Mail : info@sulky-burel.com
Postal address: SULKY-BUREL - CS 20005 - 35538 NOYAL SUR VILAINE CEDEX, France

CULTILINE HR

New Series 1000

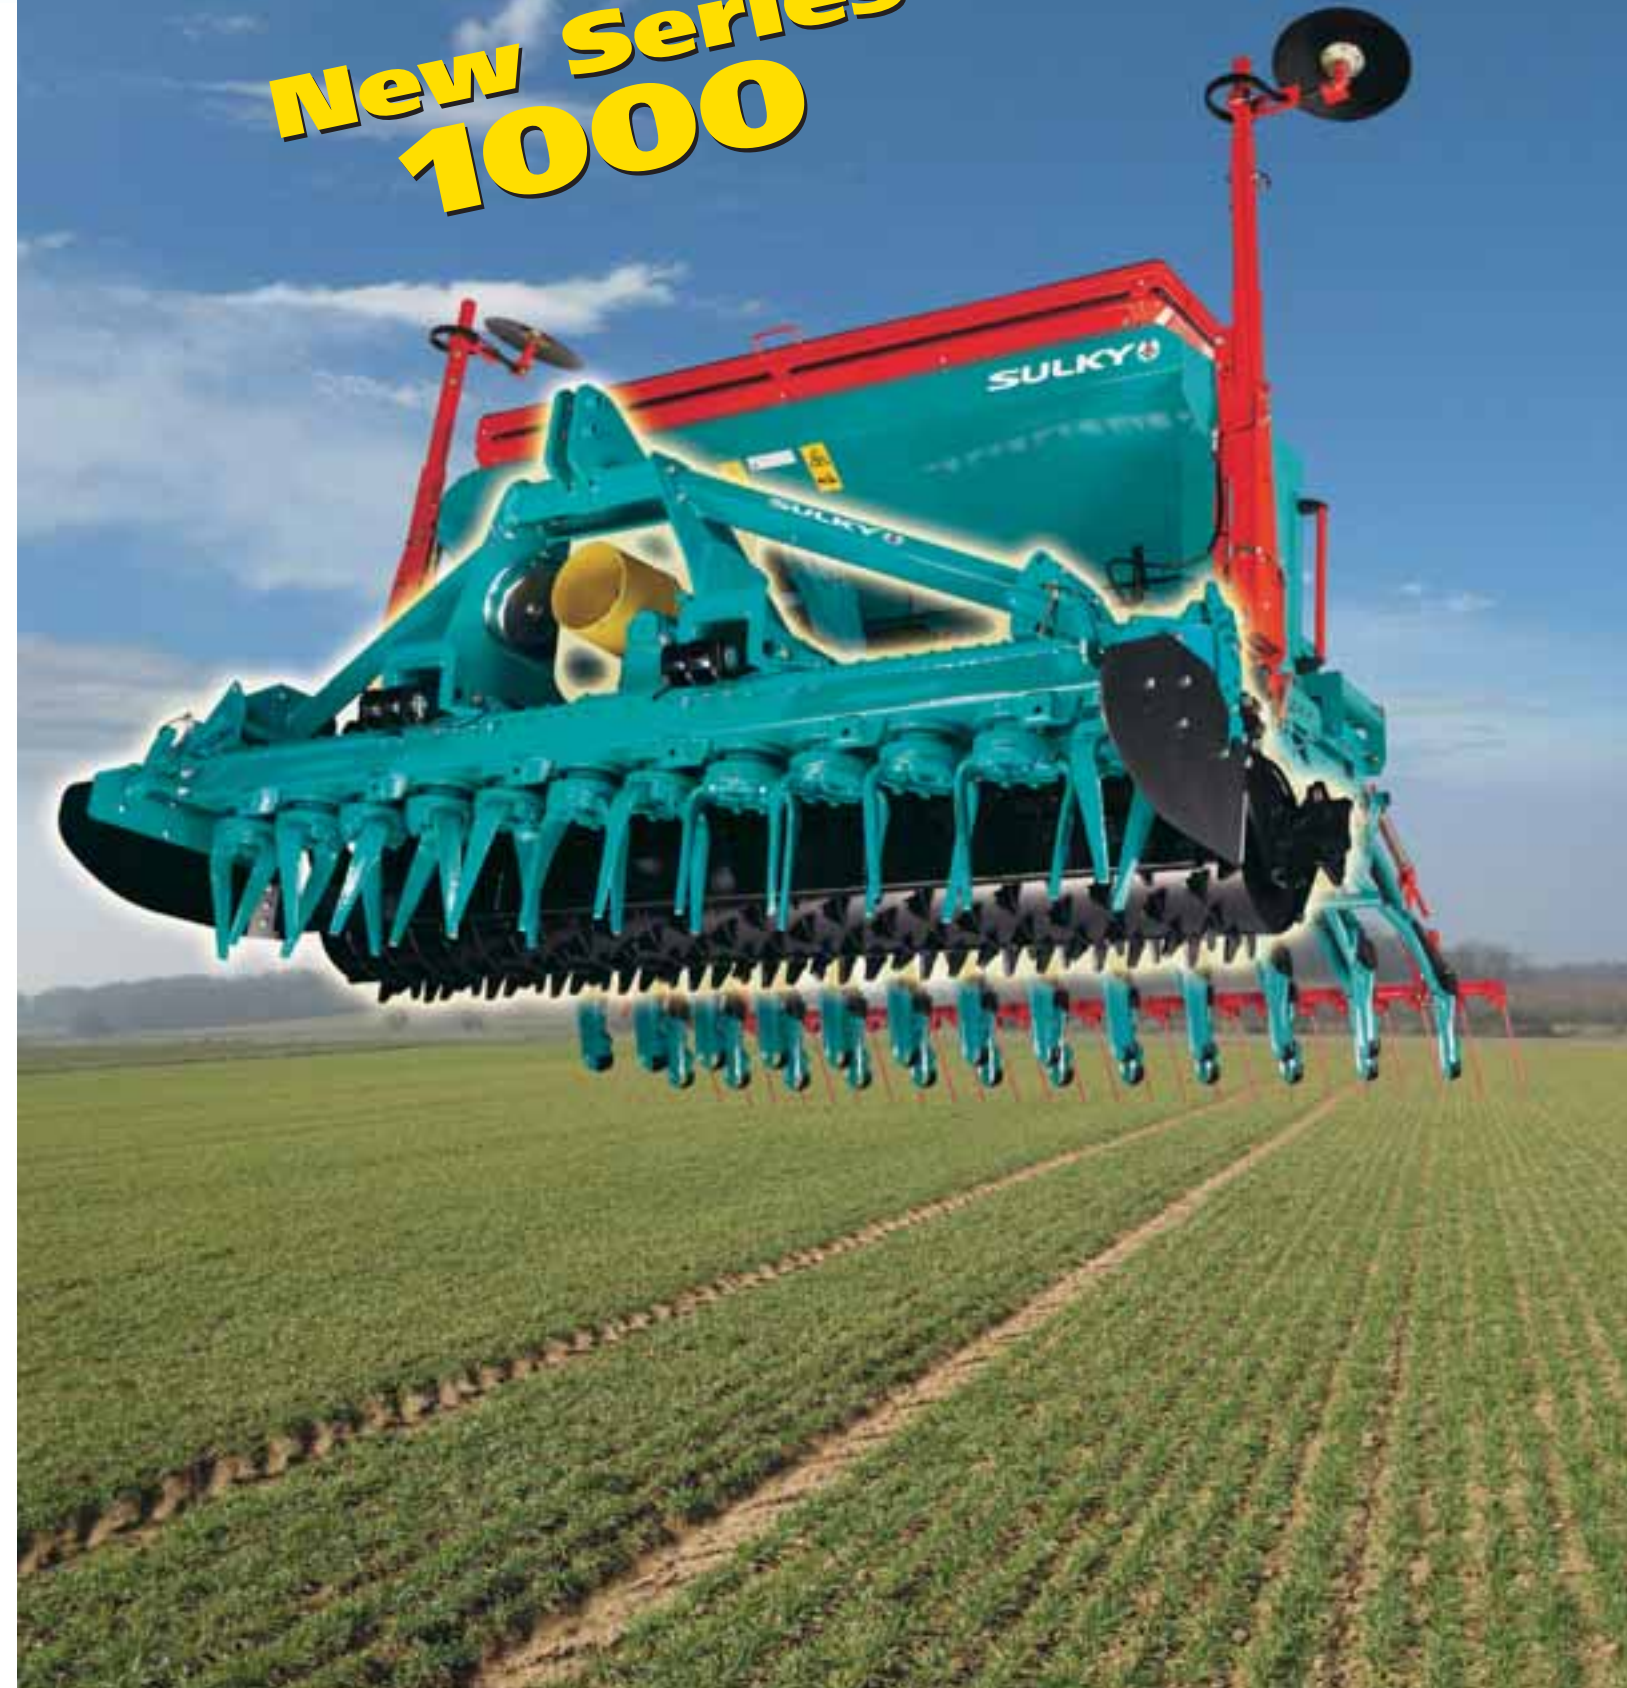

Ever more intensive work sites? The SULKYs are ready ...

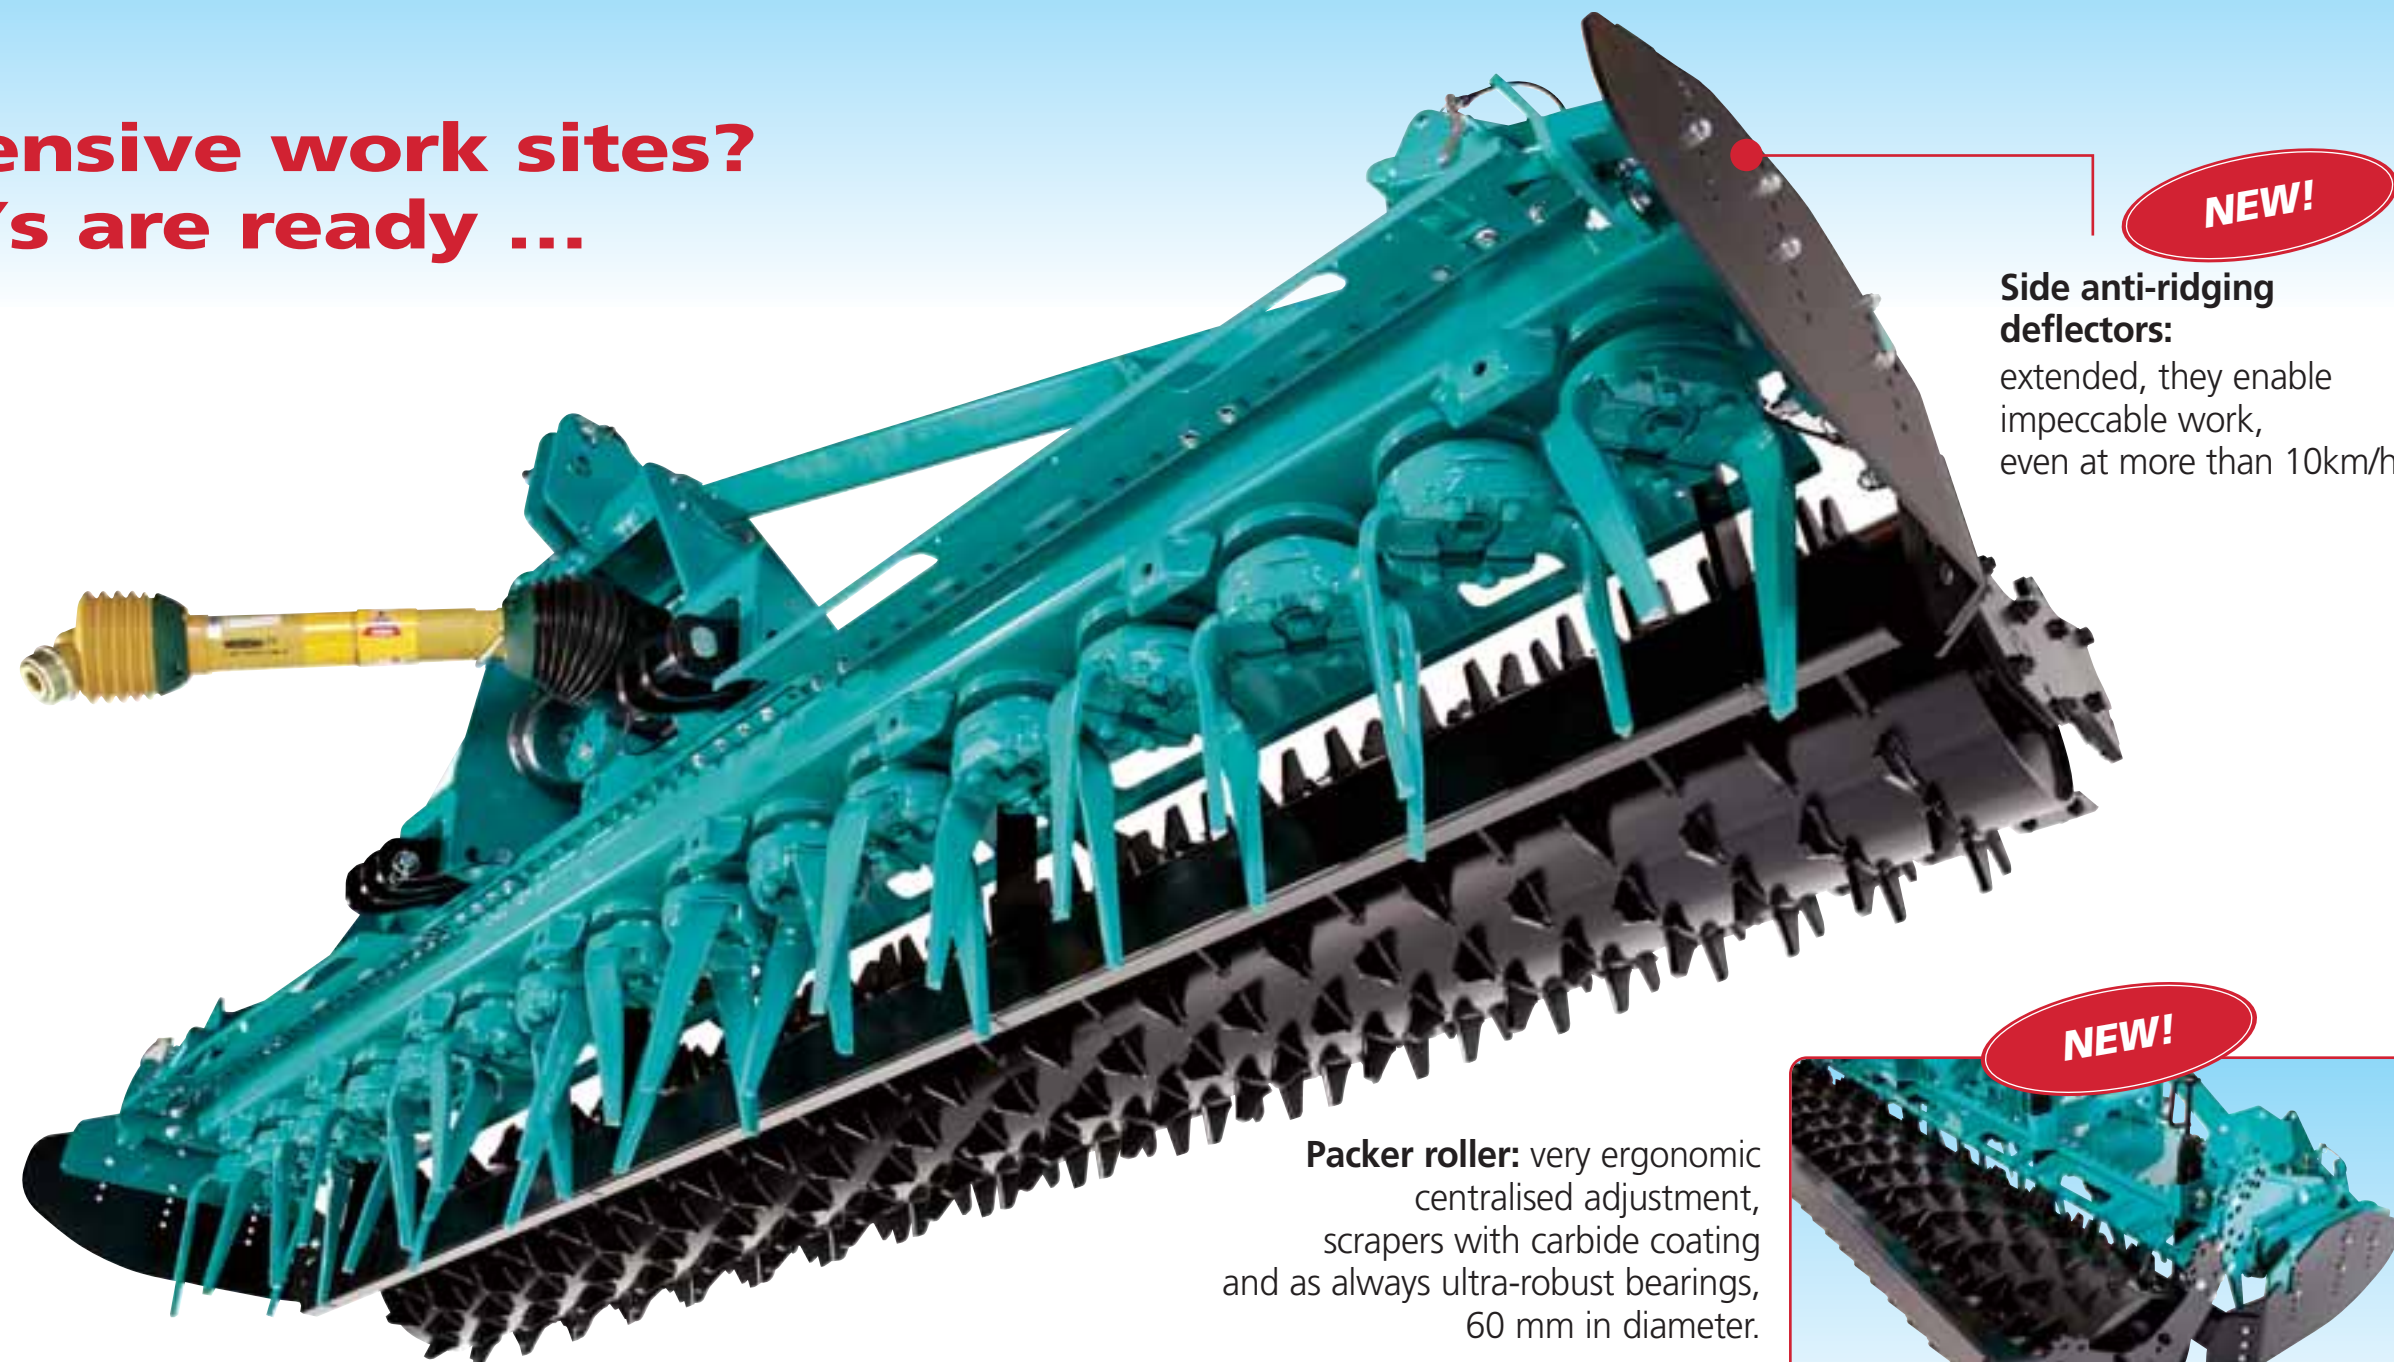

NEW!

Reinforced solid couplerhead, allowing the incorporation of a seed drill with high hopper capacity, due to the use of special steels and "top-of-the-range" screw fittings ...

NEW!

Side anti-riding deflectors: extended, they enable impeccable work, even at more than 10km/h.



NEW!

Packer roller: very ergonomic centralised adjustment, scrapers with carbide coating and as always ultra-robust bearings, 60 mm in diameter.



NEW!

Levelling bar: two ergonomic crank handles for very simple levelling adjustment




NEW!

Non-Stop track erasers: ultra-robust design (optional)

NEW!


Centralised packer roller cleaning

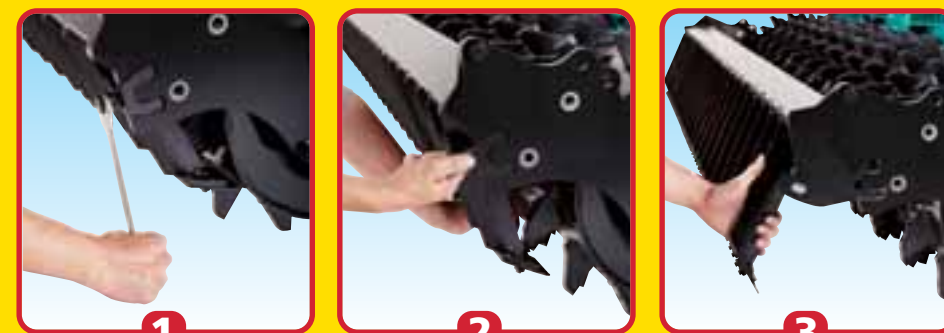

1 **2** **3**

Fast and easy cleaning by pivoting the scrapper bar, even with a seed drill fitted on the power harrow.

Service life and resale value: the "top-of-the-range" choice ...

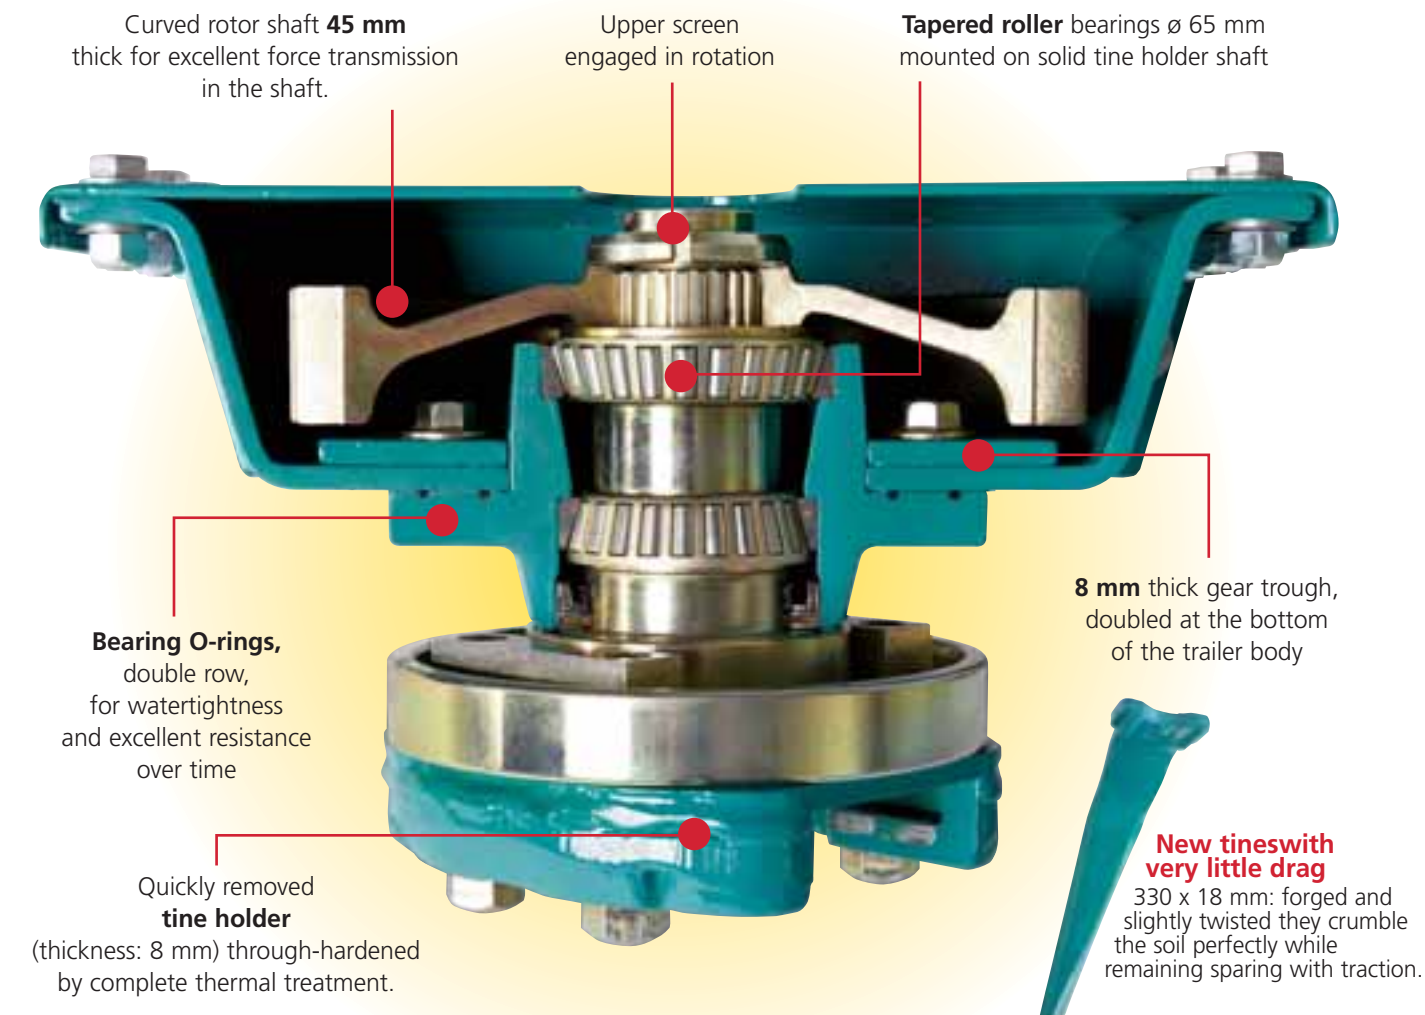

Curved rotor shaft **45 mm** thick for excellent force transmission in the shaft.

Upper screen engaged in rotation

Tapered roller bearings \varnothing 65 mm mounted on solid tine holder shaft

Bearing O-rings, double row, for watertightness and excellent resistance over time

8 mm thick gear trough, doubled at the bottom of the trailer body

Quickly removed **tine holder** (thickness: 8 mm) through-hardened by complete thermal treatment.

New tines with very little drag
330 x 18 mm: forged and slightly twisted they crumble the soil perfectly while remaining sparing with traction.

Tines quickly removed by the centre



an exclusive SULKY feature

Unlocking (1), removal of the first tine (2), removal of the second tine (3). Remove and then reattach the tines in just 3 stages, completely safely.



Bolted tines

Price competitive, you can also go for the bolted tines version (no nut for an easy change).