

SEED DRILL COMBINATION WITH MULTIPURPOSE FRONT HOPPER

XEOS TFF


NEW



SULKY 

Sowing, fertilizing, by your side...

Seed drill combination with multipurpose front hopper

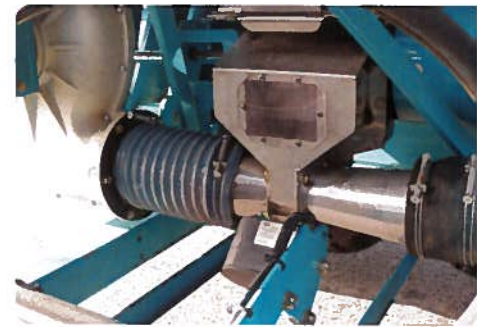

Totally stainless steel, the distribution accepts seed and fertiliser.



As standard, the XEOS TF front hopper incorporates the PILOT console with onboard radar. Optional on folding versions, the selector enables 4 hydraulic functions to be combined.



As an option directional front packer, PACK DRIVE with large tyres, 11.5/80-15 in the front position providing dynamic soil firming, less power consumption and better distribution of masses whatever the weight of the hopper.

> Better balance with the same capacity

In order to balance the front and rear load, the XEOS TF has:

- a **1000 or 1800 litres** front hopper, easy to load from the front;
- **ADS universal metering unit:** sows all seed types from OSR to beans without changing the splines;
- a side tube for **seed or fertiliser transfer** towards the distribution head located at the rear;
- a choice of UNISOC 3 R or UNIDISC **folding** seeding bar, or **non foldable** CULTIDISC bar with 80 kg down pressure fixed on the power harrow.

> "Top-of-the-range" equipment

- Electric driven metering system with radar speed sensor, hydraulically driven fan, in cab PILOT control box.
- Complete emptying of the hopper. Seed or fertiliser ability with the **stainless steel distribution**.
- As standard **LED lighting** (indicators, low beam and field lighting).
- Optional front weight brackets and front weights or PACK DRIVE self steering front packer with transport locking system.
- Optional electro hydraulic selector to **control 4 hydraulic functions** with one double-effect (folding versions only).
- CULTILINE HR rotary harrows with 4 rotors/metre and a "wide diameter" packer roller.

Specifications of XEOS TF:

XEOS TF	Fixed rear coulter bars Cultidisc 80 kg			Folding rear coulter bars Unisoc or Unidisc						
	3,00	3,50	4,00	4,00	4,50	5,00	6,00			
Working width (m)	3,00	3,50	4,00	4,00	4,50	5,00	6,00			
Number of rows	20	24	28	28	32	32	36	32	40	40
Row spacing (cm)	15	14,5	14,3	14,3	12,5	14	12,5	15,6	12,5	15
Transport width (m)	3,00	3,50	4,00	3,00						
Hopper capacity (L)	1 000 / 1 800									
Hopper 1800 l (w x d) (cm)	235 x 80									
Weight on front* (kg)	500 kg / 1 000 kg									

*Approximately in the 1800 litre version, without front packer/with front packer.