



Versatill



 **ovlac**




Versatill




All-purpose cultivation: The Versatill can work with or without wing shares depending on the required task. Particularly high guide boards provide intense mulching.



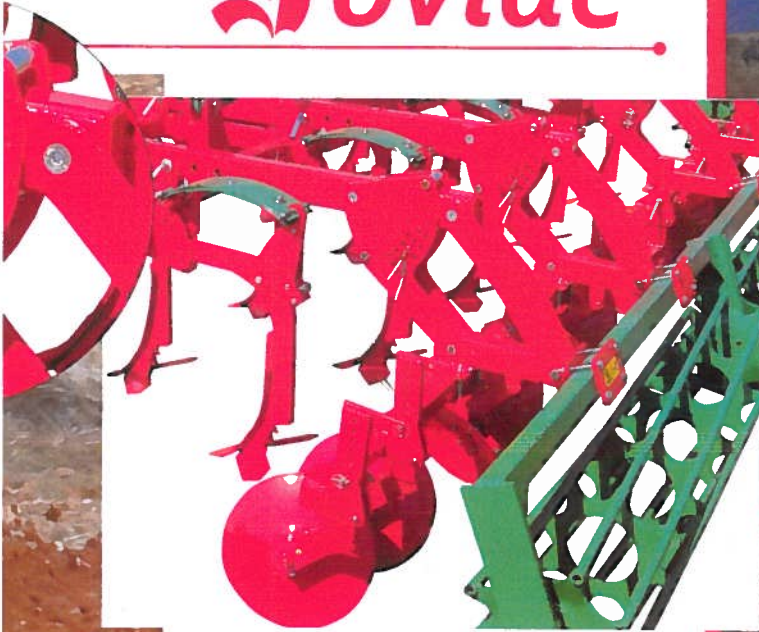

Parallelogram system to adjust discs and rear roller simultaneously

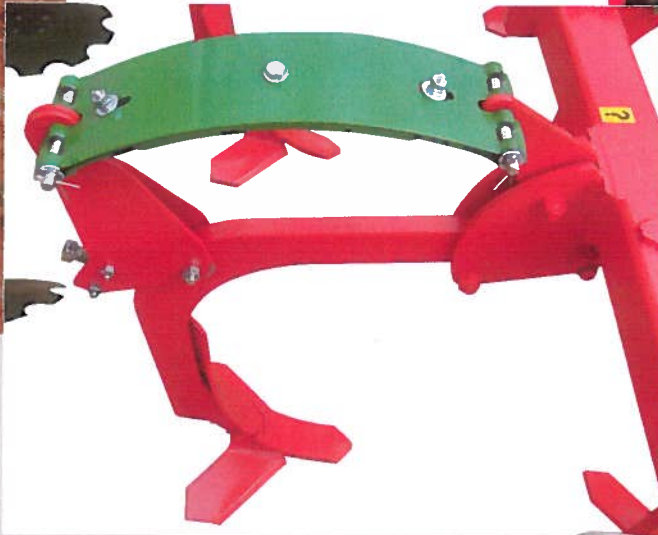

Leafspring auto reset protection. Decreasing trip pressure which protects the key structure of the Versatill. 100% maintenance-free
Beams made of wear resistant, high elasticity steel



Side discs in option



TECHNICAL CHARACTERISTIQUES

MODEL	TINES N°	WORKING WIDTH m.	TRANSPORT WIDTH m.	POWER (HP)	CLEARANCE (cm.)	POINT TO POINT (cm.)	WEIGHT (Kg.)
VERSATILL 300	10	3	3 ó 3,3	120-150	85	77	1.712
VERSATILL 350	12	3,5	3,8	140-180	85	77	1.940
VERSATILL 400-P	13	4	3	160-190	85	77	2.460
VERSATILL 450-P	15	4,5	3	180-220	85	77	2.766
VERSATILL 500-P	17	5	3	200-250	85	77	3.070

Specifications subject to change without notice



Ovlac's Versatill is conceived as an all-purpose stubble cultivator. Its 3 rows of high clearance tines (85 cm) featuring leafspring auto reset protection guarantee an optimal work in all conditions as well as trouble-free handling of high volumes of trash.

Thereafter, a row of notched discs chop, mix and level the resulting work. At the rear of the machine, a wide range of rollers is available to ensure a perfect depth control as well as an ideal finish and soil consolidation.

The ground-engaging tools configuration of the Versatill allow for different cultivation works. Guide boards together with wing shares provide an excellent mulching as they cut the whole working width. Taking the wings away and working just with the one-way points and guide boards allow for deep works down to 30 cm.

Ovlac's leafspring protection system provides the following advantages:

- Decreasing trip pressure, thus greatly reducing the stress on key elements of the Versatill's frame and structure. In the same way, raising stones up to the surface is kept down to a minimum.
- High tripping clearance, which allows to go over any obstacle without any breakdown or alteration of the working depth of the whole machine.
- 100% maintenance-free



OVLAC, S.A.
 POLIGONO INDUSTRIAL, P-163
 E-34200 VENTA DE BAÑOS (PALENCIA) ESPAÑA
 Tel.: +34 979 76 10 11
 Fax: +34 979 76 10 22

E-mail: comercial@ovlac.com

Web: <http://www.ovlac.com>



Foto: J. L. García / OVLAC